



SunPro24 Series

Vertical Energy Storage System



25.6V



5.12 kWh




1-4 units



WIFI



IP20

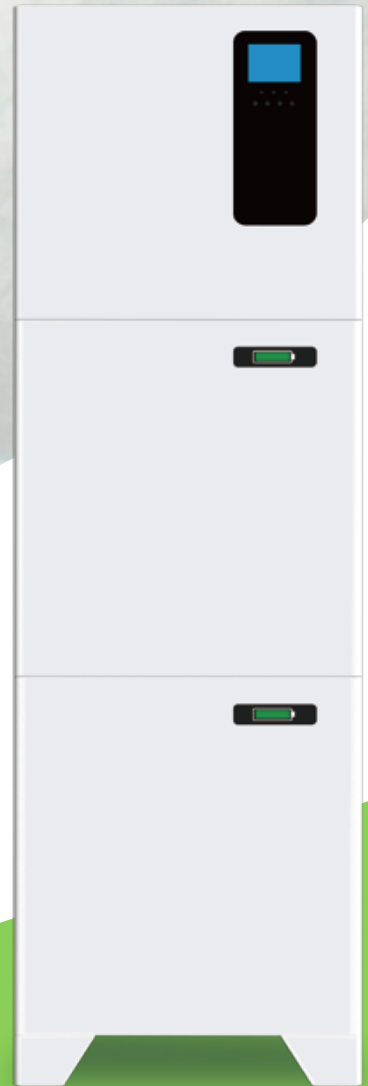

Easy to install

- No matching and commissioning required, ready to install
- Plug-and-play, eliminate the clutter of wires

Fast and flexible charging

- A variety of charging methods, which can be charged with photovoltaic or commercial power, or both at the same time

Intelligent

- The inverter has a variety of working modes. Whether it is used for main power supply in the area without electricity or backup power supply in the area with unstable power to deal with sudden power failure, the system can respond flexibly

Scalability

- You can use 2 batteries in parallel at the same time, and can provide a maximum of 10kwh for your use

Safety

- High quality lithium iron phosphate cells
- Proven Li-ion battery management solutions

Product parameters

INVERTER TECHNICAL SPECIFICATION	SunPro-C2403S
PV CHARGE	
Solar Charge Type	MPPT
Maximum Output Power	4000W
PV Charging Current Range	0~80A
PV Operating Voltage Range	120~500V
PV Operating Voltage Range	120~450V
AC CHARGE	
Maximum Charge Power	2240W
AC Charging Current Range	0~80A
Rated Input Voltage	220/230Vac
Input Voltage Range	90~280Vac
AC OUTPUT	
Rated Output Power	3500W
Maximum Output Current	30A
Frequency	50Hz
Overload Current	35A
BATTERY INVERTER OUTPUT	
Rated Output Power	3500W
Maximum Peak Power	6000VA
Power Factor	1
Rated Output Voltage (Vac)	230Vac
Frequency	50Hz
Auto Switch Period	< 15ms
THD	< 3%
BATTERY TECHNICAL SPECIFICATION	SunPro-B0805
	1
Battery Energy	5.12kWh
Battery Capacity	200AH
Weight	80kg
Dimension L×W×H	1190x600x184
Battery Type	LiFePO4
Battery Rated Voltage	25.6V
Battery Working Voltage Range	22.4 ~ 28.8V
Maximum Charging Current	150A
Maximum Discharging Current	150A
DOD	80%
Parallel Quantity	2
Designed Life-span	5000
GENERAL DATA	
Communication	RS485/CAN/WIFI
Storage time / temperature	6 months @25°C;3 months @35°C;1 months @45°C;
Charging temperature range	0~45°C
Discharging temperature range	-10~45°C
Operation Humidity	5% ~ 85%
Nominal Operation Altitude	< 2000m
Cooling Mode	Force-Air Cooling
Noise	60dB(A)
Ingress Protection Rating	IP20
Recommended Operation Environment	Indoor
Installation Method	Vertical
Certification	UN38.3,MSDS,EN55032,EN55024,EN61000-3-2,EN61000-3-3